



AIR CONDITIONING



REFRIGERATION



HEATING



EN

Hi-Capacity

CONDENSATE REMOVAL PUMP

This high efficiency boiler pump offers unsurpassed performance and is ideal for commercial boiler applications.



550L/h max. flow




5m max. rec. head (flow rate 10L/h)

KEY FEATURES


- Easy access tank
- Twist & click non return outlet barb
- Built-in spirit level
- Plug & play

SUITABILITY

- Up to 200kW / 682,000Btu/h with condensate PH value >2.2
- ✓ **Perfect for...** Larger domestic commercial gas & oil fired condensing boilers

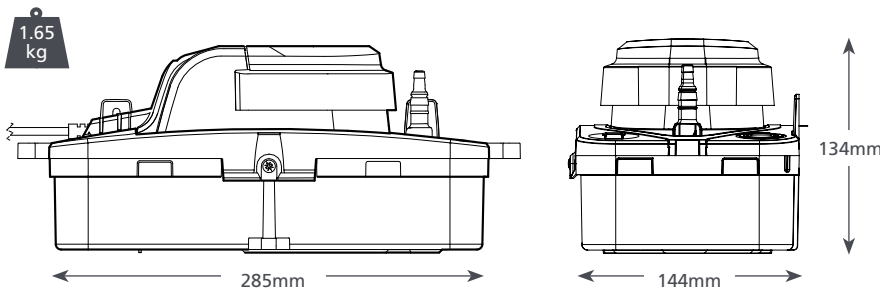

Non-return valve can be cut from 6mm to 10mm (see graphs below)





HI-CAPACITY OPTIONS

Hi-Capacity (EU)	FP3356
Hi-Capacity (UK)	FP3357

HI-CAPACITY @ 230 VAC 50Hz

Max. flow	550L/h @ 0m head
Max. rec. head	5m
Tank capacity	1.7L
dB(A) @ 1m	44
Power supply	230 VAC, 0.8A, 50Hz
Rated Class	Non continuous I appliance
Max. unit output	200kW / 682,000 Btu/h
Max. water temp	60°C / 140°F
Inlet/outlet	x4 21-27mm in, 6-10mm out
IP Protection	IP24
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

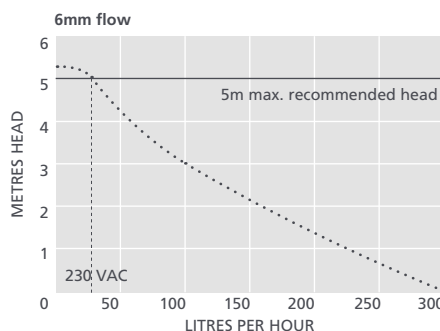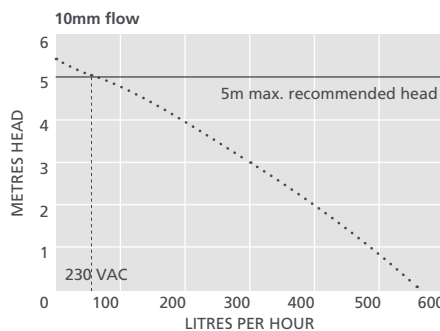

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Tube To Soil Stack Adaptor	FP2038
1 Amp Fuse	FP2620
Vinyl Tube Braided 1/4" (6mm)	AX5100
Vinyl Tube Braided 3/8" (10mm)	AX5101

Xtra For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Hi-Capacity boiler pump • 2m Plug & play power cable • 6m discharge tube (10mm ID) • Pipe adaptor • Fixing kit • x4 feet • Install manual

Download manual at aspenspumps.com

Information correct at time of going to press.



aspenspumps.com

+44 (0)1323 848842

sales@aspenspumps.com

reliable | silent | simple